

SHAKTIMAN

SIDE-SHIFT ROTARY TILLER

**SHAKTIMAN**
ROTARY TILLER

"SINCE 1997
शक्तिमान एक
उपयोग अनेक"



An important feature of this Shaktiman Side Shift Rotary Tiller is the side shift system, based on a hydraulic cylinder that, activated from the tractor cabin, adjusts the offset working position quickly and without any effort.

The SHAKTIMAN Side-Shift Rotary Tiller is used mainly for tilling in vineyards and orchards and generally in all row crops which require a working element which can be offset adjusted hydraulically through the tractor hydraulic device with allows an offset adjustable of 38 cm.





It is available with a range of working width from 116 cm to 178 cm. It is suitable for tractor from 25HP to 60 HP.

शक्तिमान साइड शिफ्ट रोटरी टीलर की मुख्य विशेषता है हाइड्रोलिक सिलेंडर पर आधारित साइड शिफ्ट सिस्टम, जो ट्रैक्टर केबिन द्वारा संचालित है, जिससे बिना किसी प्रयास के शीघ्रता से इसकी स्थिति बदली जा सकती है।


शक्तिमान साइड शिफ्ट रोटरी टीलर मुख्य रूप से अंगूर, संतरा, आम आदि फलों के बगीचे और सामान्यतः सभी पंक्तिबद्ध फसलों में उपयोग होता है। इस तरह की फसलों में लम्बवत दूरी तक जुताई करने के लिए ट्रैक्टर हाइड्रोलिक डिवाइस का इस्तेमाल किया जाता है। साइड शिफ्ट रोटरी टीलर द्वारा 38 सेमी. लम्बवत दूरी तक जुताई ट्रैक्टर हाइड्रोलिक डिवाइस के जरिए की जा सकती है। यह 116 सेमी से 178 सेमी तक कार्यशील चौड़ाई के साथ में उपलब्ध है। यह 25 हार्स पावर से 60 हार्स पावर तक के लिए ट्रैक्टर के लिए सर्वश्रेष्ठ है।

MAKING AGRICULTURE MORE ECONOMICAL

TECHNICAL SPECIFICATIONS


Model		Working Width (Cms)	 HP	 Approx.(Kg)	 Nos
SRT-4	55 61 17 99	116	34+	419	30
SRT-5	60 90 22 128	150	40+	460	36
SRT-5.5	65 98 27 136	163	50+	470	39
SRT-6	73 105 35 143	178	55+	479	42

- ★ Technical specifications shown above are of Multi Speed Gear Box and Side Gear Drive SHAKTIMAN Rotary Tiller.
- ★ Multi Speed Gear Box and Side Chain Drive Rotary Tiller weight is approximately 10 Kg. lesser than the Side Gear Drive Rotary Tiller.
- ★ Weight of Single Speed Gear Box Rotary Tiller is approximately 30 Kg. lesser than the Multi Speed Gear Box Rotary Tiller.
- ★ Drive shaft with Shear Bolt and on request choice of Drive Shaft with Clutch.
- ★ Working depth is adjustable from 4 inches to 9 inches for all models in optimum conditions.
- ★ Wheels for working depth adjustment and on request choice of skids for working depth regulation .
- ★ 6-Blades per flange and on request choice of 4-Blades per flange (Side Blades are mounted inwards).
- ★ On request EC safety Guards.

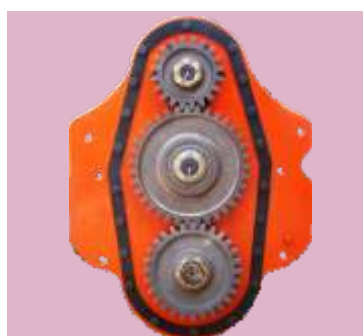

Side Gear Drive.

Choice of Side Chain Drive: Automatic spring loaded chain tensioner in chain drive.

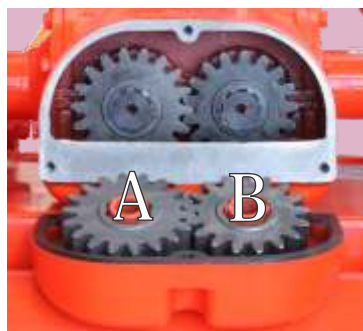

Multi Speed Gear

Box: Rotor speed 157,177,198,223,250 and 280 with Gear drive and 151,170,191,214,240 and 269 with Chain drive at 540 PTO RPM and 228,258,291 and 327 with Gear drive and 219,248,280 and 315 with Chain drive at 1000 PTO RPM. (A & B are supplied on request with extra cost.)

Single Speed Gear

Box: Rotor speed 236 with Gear drive and 227 with Chain drive at 540 PTO RPM.



Rotor with C-Blades: The Rotor is equipped with "C" blades for good soil engagement and excellent plant residues incorporating action.

Hydraulic Cylinder Device



Note: The Content of this catalogue is only giving information to the end user without engagement from our side. The company can modify specifications of the total machine and it's components without pervious notice. (इस पत्रिका में दी गई विशेषताएं सिर्फ जानकारी के लिए है। कंपनी इसके लिए बाध्य नहीं है। कंपनी तकनीकी विशेषताओं में स्वेच्छा से सुधार कर सकती है।)

Dealer:

Manufactured by:

TIRTH AGRO TECHNOLOGY PVT. LTD.
National Highway – 8B, Nr. Bharudi Toll Plaza,
At.: Bhunava – 360311 Ta.: Gondal,
Dist.: Rajkot. State: Gujarat- INDIA.
Phone : + 91 (2827) 270537, 270446, 270447.
+ 91 (281) 2377204, 2386047.
Fax : + 91 (2827) 270457, + 91 (281) 2380852,
e-mail : info@shaktimanagro.com
Website : www.shaktimanagro.com

भारत की अग्रणी कंपनी द्वारा निर्मित